


NC Integrated Controller

Machine Automation Controller NJ/NY Series

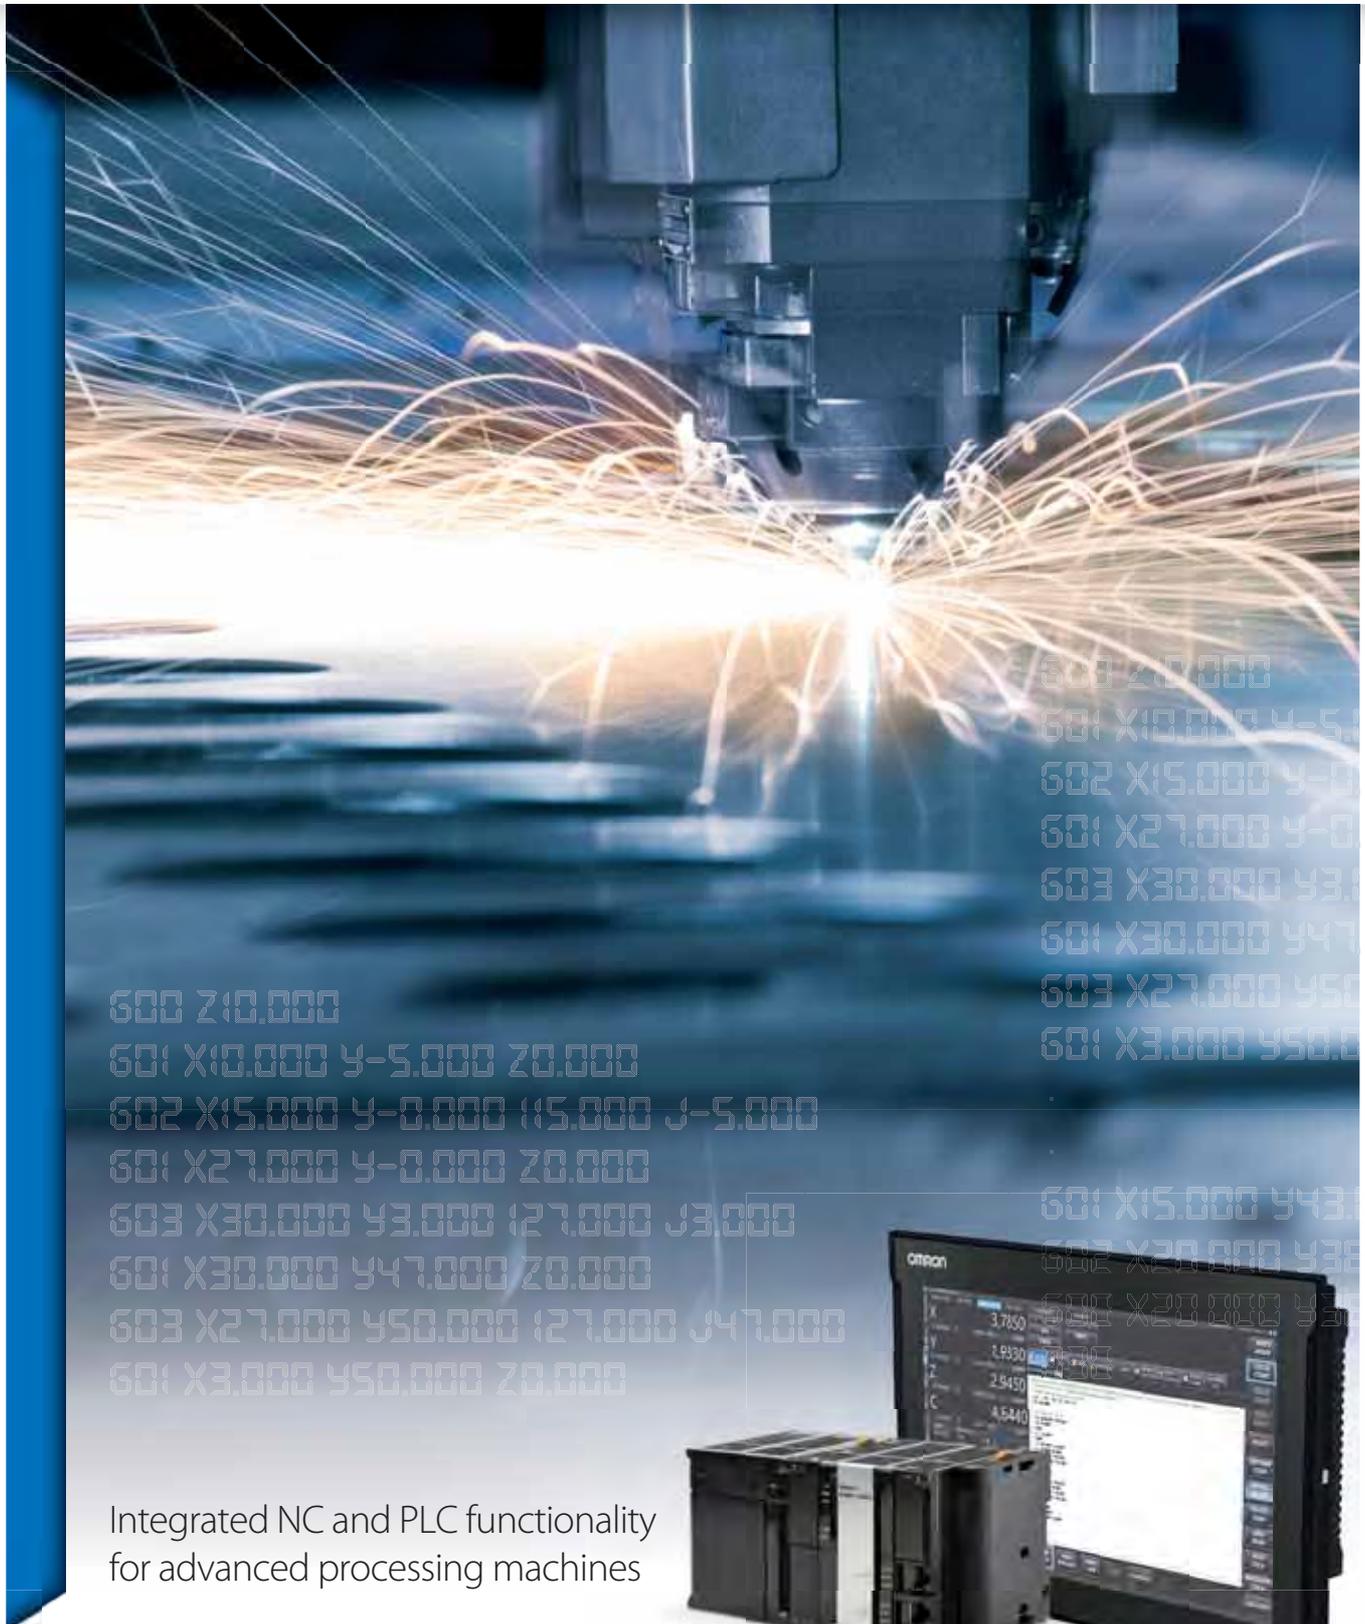

600 Z10.000
601 X10.000 Y-5.000 Z0.000
602 X15.000 Y-0.000 115.000 J-5.000
601 X27.000 Y-0.000 Z0.000
603 X30.000 Y3.000 127.000 J3.000
601 X30.000 Y47.000 Z0.000
603 X27.000 Y50.000 127.000 J47.000
601 X3.000 Y50.000 Z0.000

600 Z10.000
601 X10.000 Y-5.000
602 X15.000 Y-0.000
601 X27.000 Y-0.000
603 X30.000 Y3.000
601 X30.000 Y47.000
603 X27.000 Y50.000
601 X3.000 Y50.000

601 X15.000 Y43.000
602 X20.000 Y38.000
600 X20.000 Y38.000

Integrated NC and PLC functionality
for advanced processing machines

NC Integrated Controller brings further of multi-purpose processing machines

With changes in consumer's needs and advancement of technologies, products with more diverse and complicated shapes and materials are increasing. Along with the changes in products, manufacturing sites are facing challenges of achieving more difficult processing at higher productivity rates.

To meet customer's challenges of the future manufacturing, Omron offers a solution to maximize the throughput of multi-purpose machines that handle multiple processes.

Three benefits from NC Integrated Controller

NC and PLC functionality fully synchronized at high speed

Minimize machine cycle time

Versatile NC functions

Simplify complex profiling

One software for NC setting and PLC programming

Optimize engineering time

Experience new manufacturing with the NJ/NY NC Integrated Controller at the heart.



Sysmac Automation Platform
NJ/NY Series NC Integrated Controller

development



Minimize machine cycle time


NC and PLC functionality fully synchronized at high speed

Efficient control of processing and other processes is crucial to performance and productivity of a multi-purpose machine which handles multiple processes. The NC integrated controller provides both NC and PLC functionality and synchronizes all devices at high speed, significantly reducing the machine cycle time.

Improved synchronization


Conventional system PLC+NC

As CPU control cycles are not synchronized, communications jitter occurs

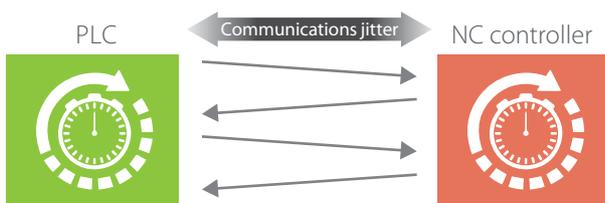

NC Integrated Controller

NC functionality and PLC functionality are fully synchronized in the same task period

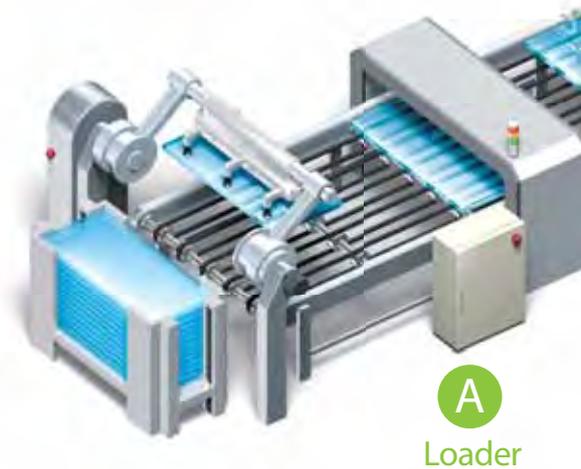


Control cycle as you designed

Programs for both PLC and NC are executed in the same task period, which enables processes to be synchronized with the cycle as you designed


Conventional system


Two control cycles are inconsistent (Communications jitter must be taken into consideration)

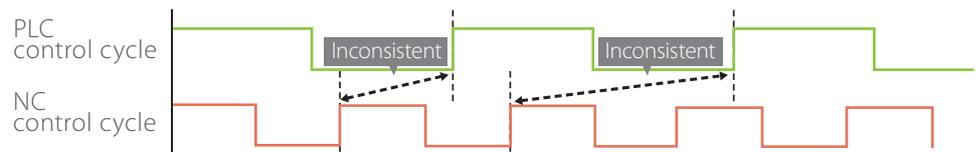

NC Integrated Controller

Two control cycles are fully synchronized

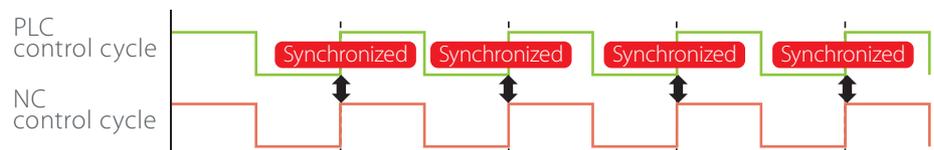


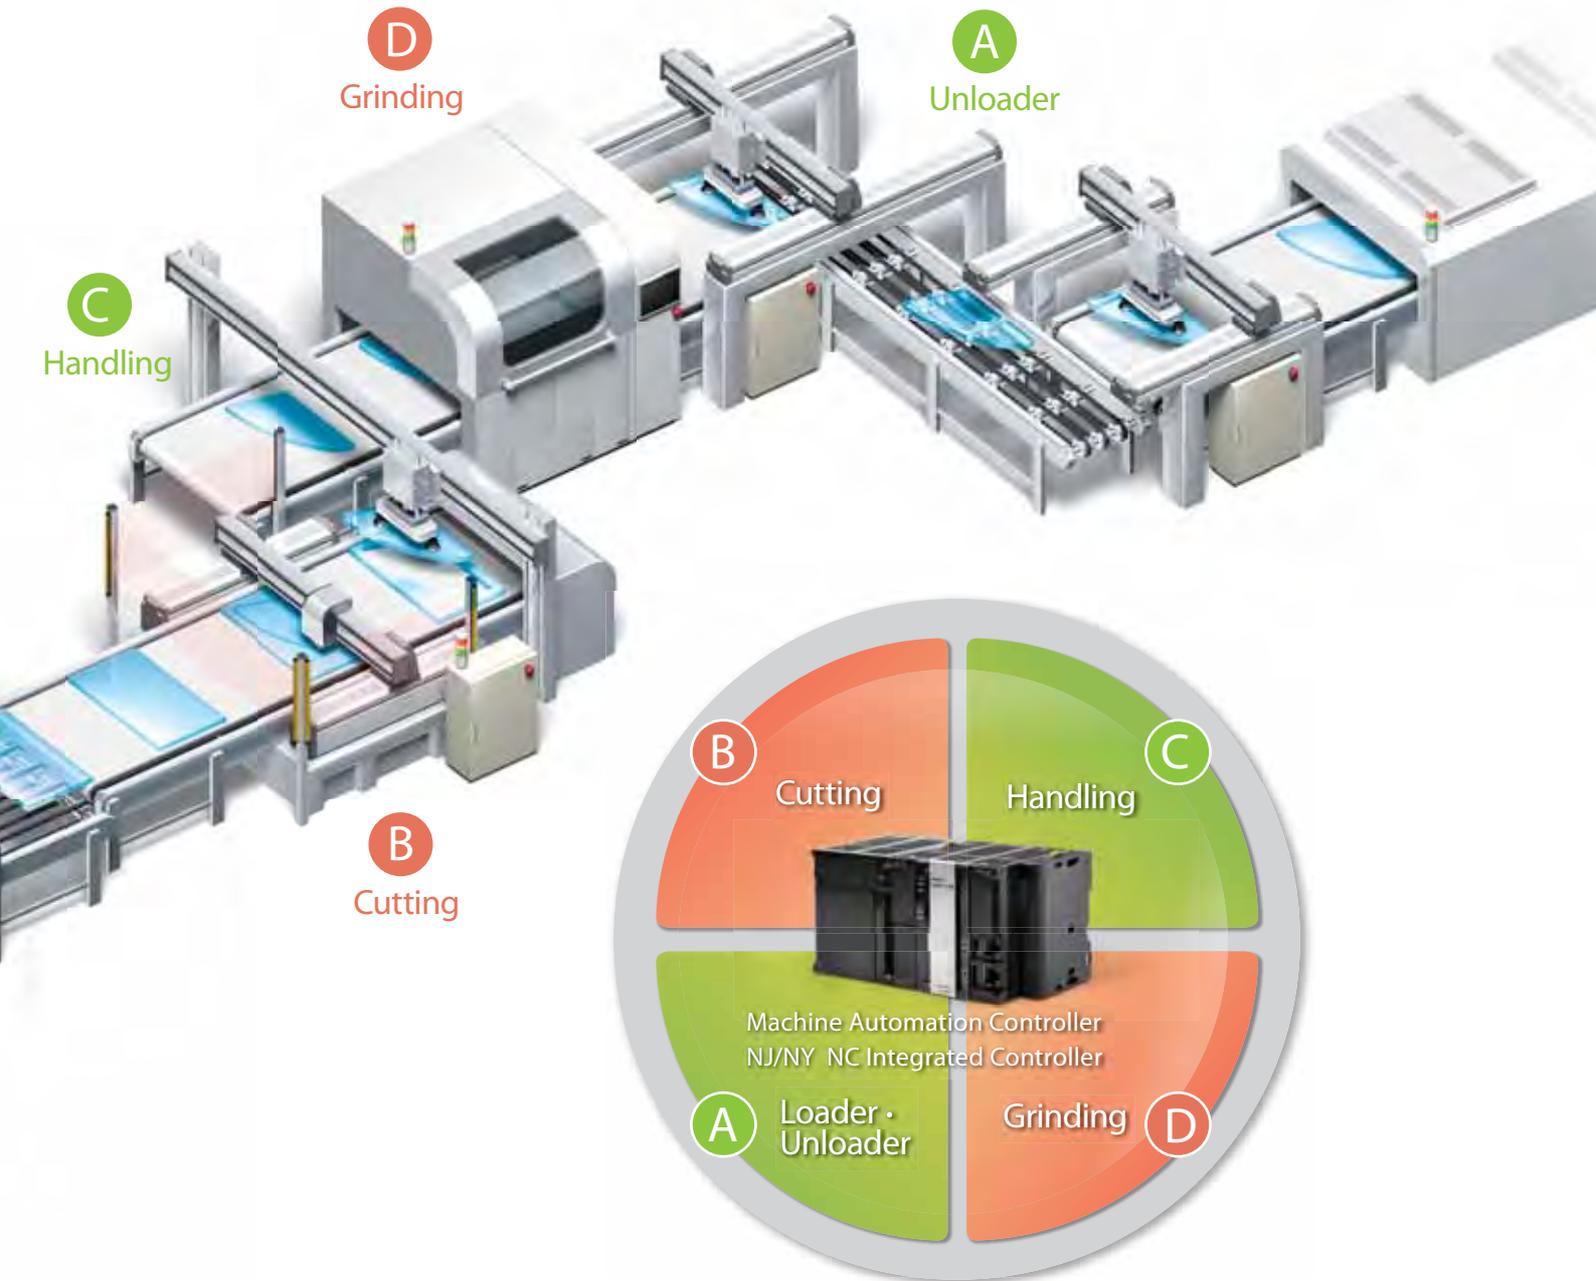

High-speed synchronization reduces interlock time

Interlock time between NC (processing) and PLC (other processes) will be reduced to 1/4* as compared to when separate controllers are used. Cycle time of a multi-purpose machine that generates many interlocks can be reduced. *The NY Series is used under our measurement conditions.

PATENT PENDING

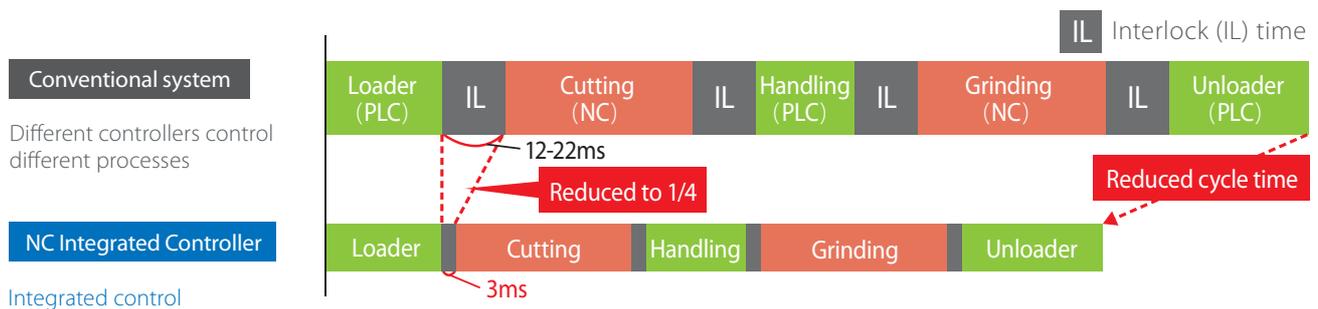

Conventional system
Different controllers control different processes

NC Integrated Controller
Integrated control

IL Interlock (IL) time

12-22ms
Reduced to 1/4

Reduced cycle time

Simplify complex profiling

Versatile NC functions

G-Code reduces time required to design and program complex profiling.

Conventional controller

Processing programs are designed based on CAD data. Programming using PLC instructions and debugging are required for each figure



CAD screen (example)

Program design

- Exploding components into lines
- Types of lines: straight line, arc, free curve
- Target positions of lines
- Travel velocities
- Transition path between figures, etc.

NC Integrated Controller

CAD/CAM software makes design easy



CAD/CAM

```
G00 Z10.000
G01 X10.000 Y-5.000 Z0.000
G02 X15.000 Y-0.000 I15.000 J-5.000
G01 X27.000 Y-0.000 Z0.000
G03 X30.000 Y3.000 I27.000 J3.000
G01 X30.000 Y47.000 Z0.000
G03 X27.000 Y50.000 I27.000 J47.000
G01 X3.000 Y50.000 Z0.000
.
.
G01 X15.000 Y43.000 Z0.000
G02 X20.000 Y38.000 I15.000 J38.000
G00 X20.000 Y38.000 Z10.000
M30
```

NC program in G-Code (example)



Parameter setting

① Parameters are set using CAD/CAM software

Automatic generation

② NC program in G-Code is generated

Transferred

③ Program is transferred to NC integrated controller



Cutting

NC functions for complex profiling applications



G-Code

G-Code NC programming language allows manual programming on operation software and use in combination with any CAD/CAM software



High-speed control

Logic sequence, motion control and NC functionality with the fastest cycle time of 500 μ s



Cutter compensation 2D

Tool diameter and shape compensation, matching the cutting point exactly as specified in G-Code




Lookahead

Future instructions are analyzed in advance, movements are blended and optimized in speed and acceleration for a better performance




Block Retrace

Path can be reverted in order to remove the tool from cutting area




Compensation

High-precision processing by compensating position of NC motors



3D interpolation

Helical, spiral and conical interpolation for 3D profiling



Coordinate systems

Various profiling using machine coordinate system, workpiece coordinate system, and local coordinate system



Milling



Grinding



Dispensing




Sewing

Optimize engineering time


One software for NC setting and PLC programming

The Sysmac Studio provides a true Integrated Development Environment (IDE) for configuration, programming, monitoring, and 3D simulations. Programming based on IEC standard and PLCopen® Function Blocks (FBs) for motion control cuts programming time. FBs for NC control make program structure simple, even for synchronization between NC process and others.

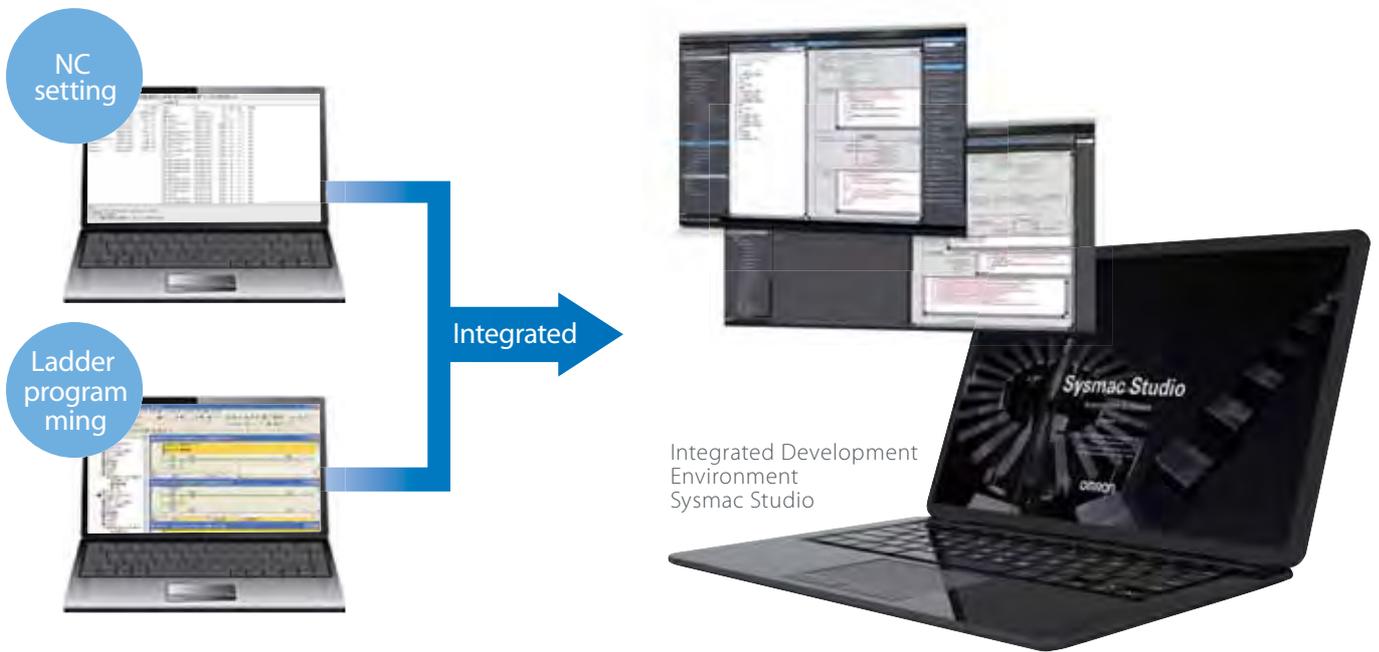


Intuitive user interface reduces configuration time

Easy to find NC settings

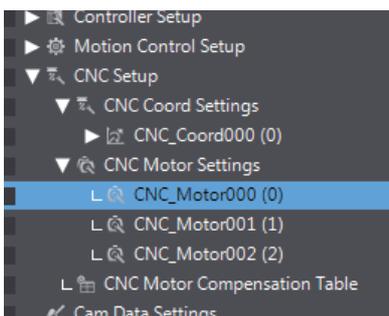

Parameter setting by device

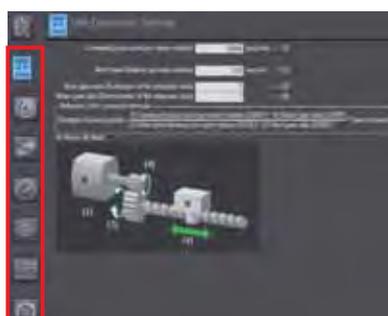

Description of parameters

Description with graphics gives parameter details



A choice of two controllers

▶ For specific purpose machines

A modular controller suitable for machines programmed for NC

- Combine with general-purpose HMI and your own PLC
- Traditional reliability and robustness
- Up to 16 synchronous axes, including NC processing and motion control



Machine Automation Controller
NJ NC Integrated Controller

▶ For general purpose machines

A panel PC provides general-purpose HMI functionality that allows machine users to edit NC programs



Industrial Panel PC
NY NC Integrated Controller

- Reliable and robust industrial panel PC
- Omron's unique CNC Operator for editing NC programs and performing functions
- Comes equipped with Windows OS, running Windows applications while performing motion control
- Up to 32 synchronous axes, including NC processing and motion control
- Intel® Core™ i7-4700EQ processor

Graphic user interface for NC - CNC Operator




Operation software for PC to use NC functionality
Customizable software allows adding functionality by users
(Requires Microsoft Visual Studio)

Total solution to maximize machine throughput

Integration and functionality

Sysmac is an integrated automation platform dedicated to providing complete control and management of your automation plant. At the core of this platform, the controller series offers synchronous control of all machine devices and advanced functionality. This multidisciplinary concept allows you to simplify solution architecture, reduce programming and optimize productivity.

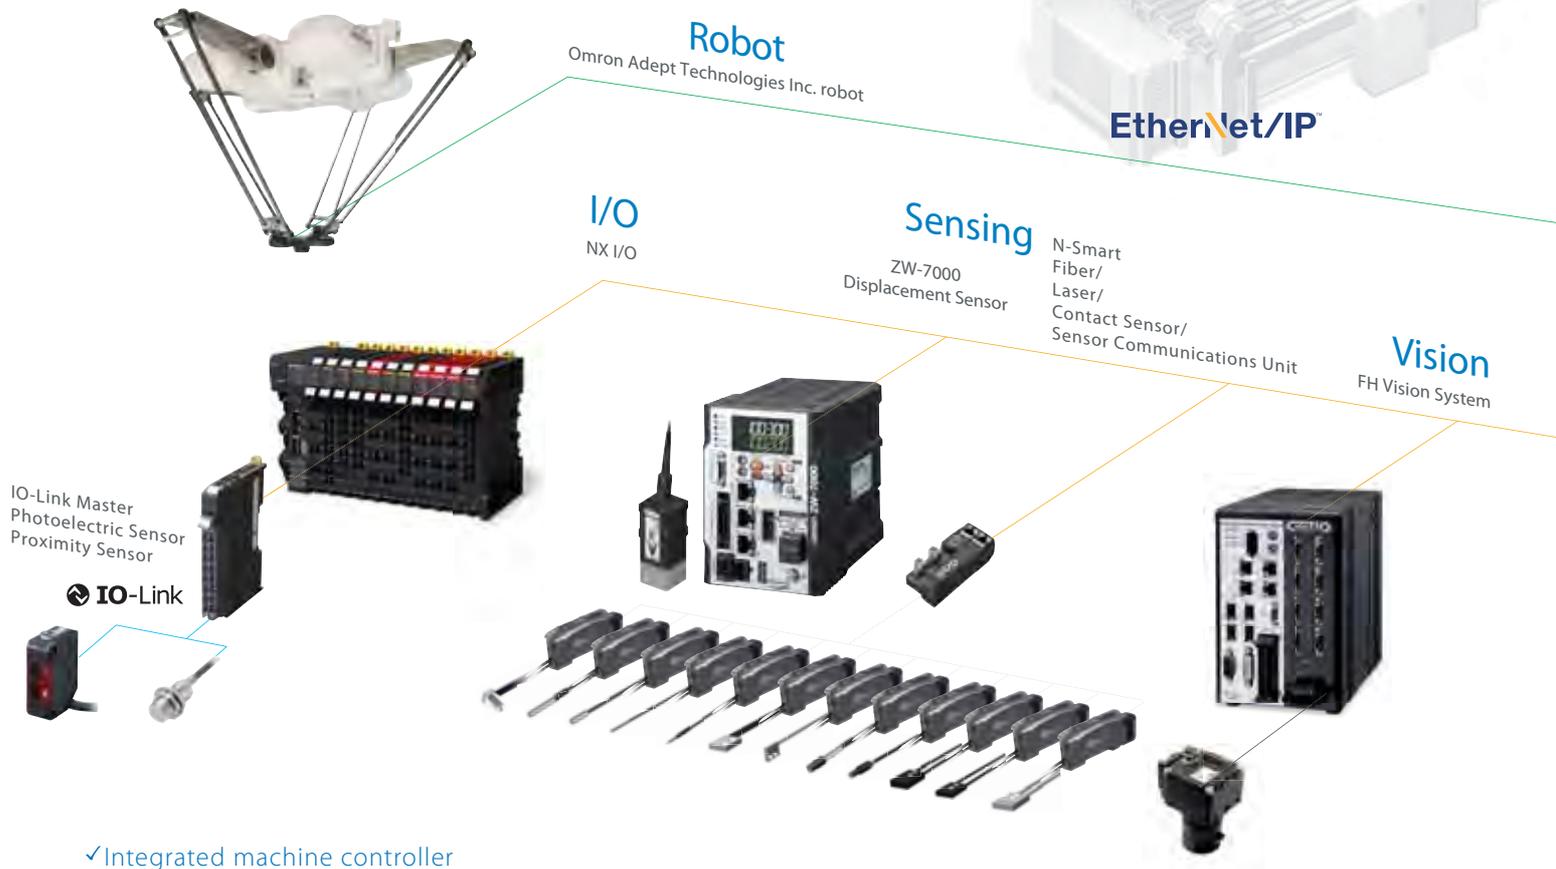

✓ Integrated machine controller


Logic sequence, motion, safety, I/O, vision, and NC in one. One integrated controller offers speed, flexibility and scalability of software centric architecture without compromising on the traditional reliability and robustness that you have come to expect from Omron PLCs.

✓ Perfect match between fast machine control and data plant management.

Built-in ports: Machine control network EtherCAT® and factory automation network EtherNet/IP™. The two networks with one connection purpose is the perfect match between fast real time machine control and data plant management.

✓ A wide range of products for complete production line

Our industry-leading lineup: Input (photoelectric/proximity/vision sensors, switches), Logic (PLCs, controllers), Output (servo systems, inverters, relays), and Safety.

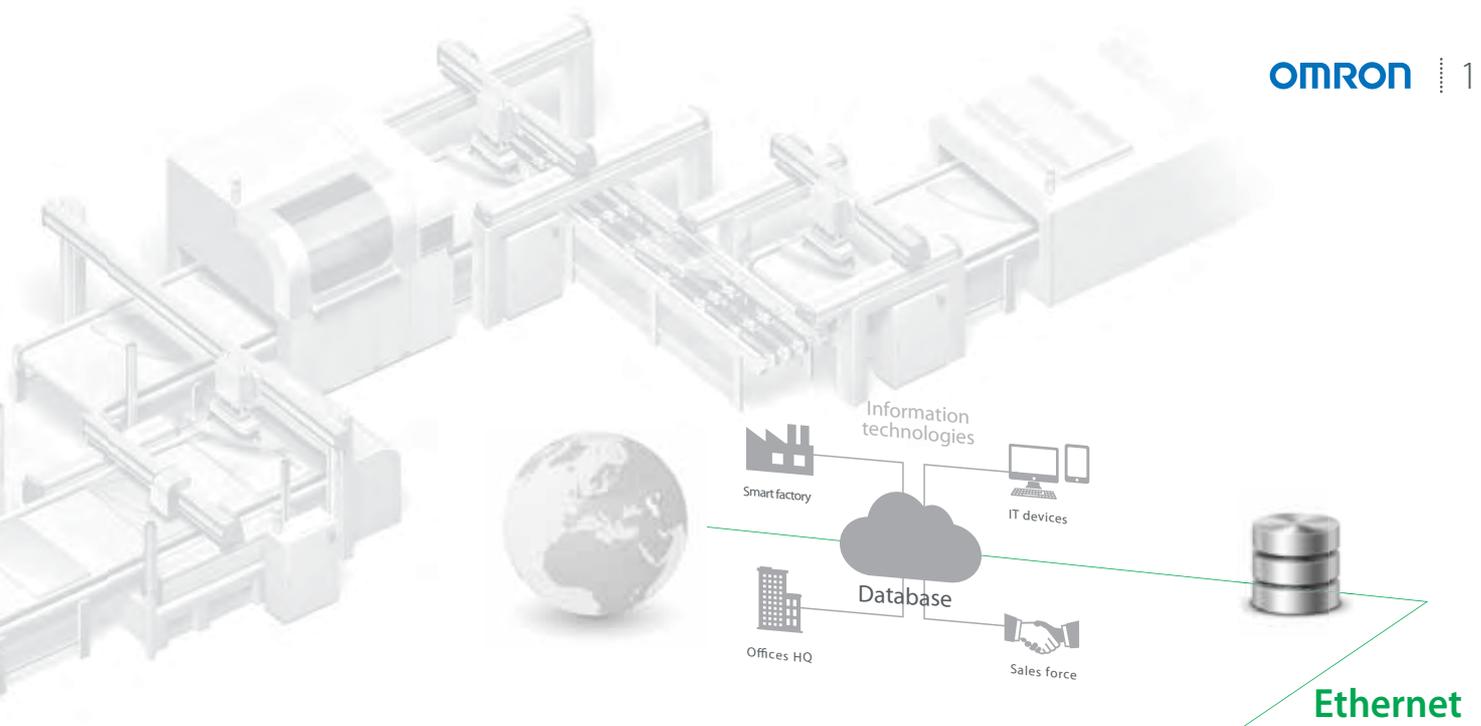

Sysmac Library

IPC Machine Controller
NY NC Integrated Controller



Machine Automation Controller
NJ NC Integrated Controller



Safety
NX Safety

EtherCAT

Motion


NC



MX2 Inverter

G5/1S Servo Drive

G5/1S Servo Drive




Motors



Motors



Linear motors



SYSMAC
always in control

Product family

MACHINE CONTROLLER



15.4' inch



12.1' inch



Product name		NJ/NY series NC Integrated Controller			
Model		NY532-5400-□		NJ501-5300	
Hardware		Industrial Panel PC		Modular controller	
Display		15.4' inch		12.1' inch	
Storage		128 GB SSD MLC	64 GB SSD SLC	128 GB SSD MLC	64 GB SSD SLC
Operating system		Windows Embedded Standard 7 – 64 bit			
Task		Multi-tasking program			
Control functionality		<ul style="list-style-type: none"> Logic sequence Motion NC 			
Number of axes	Max. synchronous axis	32		16	
	Synchronous axes per channel	4			
	Number of channels	8		4	
Fastest cycle time		500 μs			
Software tool	Integrated Development Environment	Sysmac Studio: <ul style="list-style-type: none"> Ladder, Structured Text, In-Line ST IEC61131-3 PLCopen for Motion Control and Safety G/M Code 			
	Graphic user interface	CNC operator: <ul style="list-style-type: none"> G/M Code 			
Interpolation functions	Compensation	Tool Radius/Length, Cross, LeadScrew			
	Interpolation	Linear, Circular, Helical, Conical, Spiral			
	Coordinate system	MCS, WCS, LCS, Mirror, Scaling, Rotation, Plane Selection...			
	Others	FeedRate Control, Accel/Decel Control, Lookahead, Machine Lock, Dry Run, Back Trace...			
Program capacity		40 MB		20 MB	
NC program buffer		64 MB		20 MB	
Memory card		SD and SDHC			
Built-in port		Ethernet, EtherNet/IP, EtherCAT, USB 3.0/2.0, DVI, RS-232C		EtherNet/IP, EtherCAT, USB	
EtherCAT slaves		192			
Mounting		On panel		DIN rail	
Global standards		EU Directives, cULus, RCM and KC Registration			

SOFTWARE

	INTEGRATED DEVELOPMENT ENVIRONMENT	OPERATION SOFTWARE
	 	

Product name	Sysmac Studio	CNC Operator License*	CNC Operator Software Development Kit
Model	SYSMAC-SE2□□□	SYSMAC-RTNC0001L	SYSMAC-RTNC0101D
Functions	<ul style="list-style-type: none"> Sysmac Studio is the Integrated Development Environment to configure, program and maintain all Sysmac Controllers and devices. One single project file for the entire machine. Intuitive IDE for logic, motion, safety, robotics, drives, vision, HMI and networks NC. Reduce engineering and maintenance costs by using Omron libraries and IAGs. Develop your own libraries. IEC-61131-3 compliant. PLCopen FBs for motion and safety. G/M Code available Advanced functions for CAM editing, Drive tuning, 3D simulation, libraries and namespaces, vision algorithms, HMI design and complete machine maintenance. Full Digital Machine development environment including: EtherNet/IP, EtherCAT, IO-Link, SQL and FTP. Offline Simulation for logic, motion, robotics, safety and vision. Advanced security function with 32 digit security password. 	<ul style="list-style-type: none"> G-Code File Editor Execution monitor Active G/M code display Command terminal Jogging, homing 	<ul style="list-style-type: none"> The CNC Operator Software Development Kit provides a environment for customization of CNC Operator.

*One CNC Operator License (SYSMAC-RTNC0001L) is bundled with a CPU Unit. Purchase additional licenses if required.

G-CODE

Code	Function
G00	Rapid Positioning
G01	Liner Interpolation
G02	Circular Interpolation in CW direction
G03	Circular Interpolation in CCW direction
G04	Dwell
G09	Exact Stop
G17	X-Y Plane Selection
G18	Z-X Plane Selection
G19	Y-Z Plane Selection
G20	Inch Input
G21	Metric Input
G28	Return to Reference Point
G30	Return to 2nd, 3rd or 4th Reference Point
G31	Skip Function
G40	Cancels Tool Compensation

Code	Function
G41	Tool Compensation, Left
G42	Tool Compensation, Right
G43	Tool Offset, Positive
G44	Tool Offset, Negative
G49	Cancels Tool Offset
G50	Cancel Scaling
G51	Scaling
G50.1	Cancel Mirroring
G51.1	Mirroring
G52	Local Coordinate System Set
G53	Dimension Shift Cancel
G54	1st work coordinate system
G55	2nd work coordinate system
G56	3rd work coordinate system
G57	4th work coordinate system

Code	Function
G58	5th work coordinate system
G59	6th work coordinate system
G61	Exact Stop Mode
G64	Continuous-path Mode
G68	Enables rotation
G69	Disables rotation
G74	Left-handed Tapping Cycle
G80	Fixed Cycle Cancel
G84	Tapping Cycle
G90	Absolute command
G91	Incremental command
G98	Fixed Cycle Return to Initial Level
G99	Fixed Cycle Return to R Point Level
G500	Enables Multi-block Acceleration/Deceleration Rate
G501	Disables Multi-block Acceleration/Deceleration Rate

SERVOMOTORS/LINEAR MOTORS/DRIVES



Product name	G5 Servo Drives	1S Servo Drives
Type	Built-in EtherCAT Communications	Built-in EtherCAT Communications
100 VAC Applicable motor capacity/force	50 to 400 W	100 to 400W
200 VAC Applicable motor capacity/force	50 W to 15 kW	100 to 3kW
400 VAC Applicable motor capacity/force	400 W to 15 kW	600 to 3kW
Applicable servomotor	G5 rotary servomotor, G5 linear motor	1S servomotor
Control mode	Position, speed and torque control	Position, speed and torque control
Safety approvals	<ul style="list-style-type: none"> • ISO13849-1 (PL-c,d) • EN61508 (SIL2) • EN62061 (SIL2) • IEC61800-5-2 (STO) 	<ul style="list-style-type: none"> • ISO13849-1 (PL-e/PL-d) • EN61508 (SIL3/SIL2) • EN62061 (SIL3/SIL2) • IEC61800-5-2 (STO)
Full closed loop	Built-in	No
Ordering information	G5 Series Catalog (Cat. No.I815)	1S Series Catalog (Cat. No.I821)



Product name	G5 Servomotors		1S Servomotors	
Rated rotation speed	3,000 r/min	2,000 r/min	3,000 r/min	2,000 r/min
Momentary maximum rotation speed	4,500 to 6,000 r/min	3,000 r/min	5000 to 6000 r/min	3000 r/min
Rated torque	0.16 to 15.9 Nm	1.91 to 23.9 Nm	0.318 to 9.55N-m	4.77 to 14.3 N-m
Capacity	50W to 5 kW	400W to 5 kW	100W to 3 kW	400W to 3kW
Applicable servo drive	G5 Servo Drive (for rotary servomotor)		1S Servo Drive	
Encoder resolution	20-bit incremental/ 17-bit absolute	20-bit incremental/ 17-bit absolute	23-bit absolute	23-bit absolute
Protective structure	IP67	IP67	IP67	IP67
Ordering information	G5 Series Catalog (Cat. No.I815)		1S Series Catalog (Cat. No.I821)	



Product name	G5 Servomotors		1S Servomotors
Rated rotation speed	1,500 r/min	1,000 r/min	1,000 r/min
Momentary maximum rotation speed	2,000 to 3,000 r/min	2,000 r/min	2000 r/min
Rated torque	47.8 to 95.5 Nm	8.59 to 57.3 Nm	8.59 to 28.7 N-m
Capacity	7.5 to 15 kW	900 W to 6 kW	900 W to 3kW
Applicable servo drive	G5 Servo Drive (for rotary servomotor)		1S Servo Drive
Encoder resolution	17-bit absolute	20-bit incremental/ 17-bit absolute	23-bit absolute
Protective structure	IP67	IP67	IP67
Ordering information	G5 Series Catalog (Cat. No.I815)		1S Series Catalog (Cat. No.I821)

I/O

		
Series	NX	GX
Type	Modular I/O	Block I/O
Communications interface	EtherCAT	EtherCAT
Number of connectable units	<ul style="list-style-type: none"> • 63 units max. • Input: 1,024 bytes max., output: 1,024 bytes max. 	One expansion unit can be connected with one digital I/O terminal (16 inputs + 16 outputs)
I/O types	<ul style="list-style-type: none"> <li style="width: 33%;">• Digital I/O <li style="width: 33%;">• Analog I/O <li style="width: 33%;">• Encoder input <li style="width: 33%;">• Pulse output <li style="width: 33%;">• Temperature input <li style="width: 33%;">• Safety 	<ul style="list-style-type: none"> <li style="width: 50%;">• Digital I/O <li style="width: 50%;">• Analog I/O <li style="width: 50%;">• Encoder input <li style="width: 50%;">• Expansion unit
Features	<ul style="list-style-type: none"> • Over 100 models of I/O units including position interface, temperature inputs and integrated safety • High-speed I/O units synchronized with the EtherCAT cycle • NsynX technology provides deterministic I/O response with nanosecond resolution • Detachable front connector with push-in type screw-less terminals in all NX I/O units • Up to 32 digital inputs or outputs 	<ul style="list-style-type: none"> • Wide variety of lineup: digital I/O, analog I/O, and encoder input units • Easy maintenance: removable I/O terminal • Easy set-up: automatic and manual address setting
Mounting	DIN track	DIN track
Ordering information	NX-series I/O System Catalog (Cat. No.R183)	GX Series Data Sheet

SAFETY

			
Product name	NX Safety CPU Unit	NX Safety Input Unit	NX Safety Output Unit
Network	FSoE – Safety over EtherCAT	FSoE – Safety over EtherCAT	FSoE – Safety over EtherCAT
Applicable Standards	EN ISO 13849-1,2 (PLe/Safety Category 4), IEC 61508 (SIL3), EN 62061 (SIL CL3), EN 61131-2	EN ISO 13849-1,2 (PLe/Safety Category 4), IEC 61508 (SIL3), EN 62061 (SIL CL3), EN 61131-2	EN ISO 13849-1,2 (PLe/Safety Category 4), IEC 61508 (SIL3), EN 62061 (SIL CL3), EN 61131-2
Programming	<ul style="list-style-type: none"> • IEC 61131-3 standard • PLCopen Function Blocks for Safety 	---	---
Number of safety master connections	32/128	---	---
Number of safety input/output points	---	<ul style="list-style-type: none"> • 4 points • 8 points 	<ul style="list-style-type: none"> • 2 points • 4 points
Number of test output points	---	2 points	---
Terminal block	---	Screwless damping terminal block	Screwless damping terminal block
Features	<ul style="list-style-type: none"> • Freely mixing with standard NX I/O • Reusable certified programs • NX variables sharing in the NJ controller project 	<ul style="list-style-type: none"> • Freely mixing with standard NX I/O • The 4-point unit can be directly connected with OMRON non-contact switches and singlebeam sensors • I/O data monitoring in the NJ controller project 	<ul style="list-style-type: none"> • Freely mixing with standard NX I/O • The 2-point unit is characterized by large output breaking current of 2.0 A • I/O data monitoring in the NJ controller project
Mounting	DIN track	DIN track	DIN track
Ordering information	NX-SL/SI/SO Data Sheet		

Sysmac is a trademark or registered trademark of OMRON Corporation in Japan and other countries for OMRON factory automation products. Microsoft, Visual Basic, and Windows are either registered trademark of Microsoft Corporation in the United States and other countries. Microsoft product screen shot(s) reprinted with permission from Microsoft Corporation. EtherCAT® is registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany. Intel, and Intel Core are trademarks of Intel Corporation in the U.S. and other countries. EtherNet/IP™, DeviceNet™ are trademarks of the ODVA. Intel and Intel Core are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries. Other company names and product names in this document are the trademarks or registered trademarks of their respective companies. The product photographs and figures that are used in this document may vary somewhat from the actual products.

OMRON Corporation Industrial Automation Company
Kyoto, JAPAN

Contact: www.ia.omron.com

Regional Headquarters

OMRON EUROPE B.V.

Wegalaan 67-69, 2132 JD Hoofddorp
The Netherlands
Tel: (31)2356-81-300/Fax: (31)2356-81-388

OMRON ELECTRONICS LLC

2895 Greenspoint Parkway, Suite 200
Hoffman Estates, IL 60169 U.S.A.
Tel: (1) 847-843-7900/Fax: (1) 847-843-7787

OMRON ASIA PACIFIC PTE. LTD.

No. 438A Alexandra Road # 05-05/08 (Lobby 2),
Alexandra Technopark,
Singapore 119967
Tel: (65) 6835-3011/Fax: (65) 6835-2711

OMRON (CHINA) CO., LTD.

Room 2211, Bank of China Tower,
200 Yin Cheng Zhong Road,
PuDong New Area, Shanghai, 200120, China
Tel: (86) 21-5037-2222/Fax: (86) 21-5037-2200

Authorized Distributor:

© OMRON Corporation 2017 All Rights Reserved.
In the interest of product improvement,
specifications are subject to change without notice.

CSM_1_1_0917

Cat. No. R190-E1-01

0917(0917)